




SPECIFICATIONS

Model name	EH65
Type	Air-cooled, OHV, V-twin, Horizontal shaft
Bore x Stroke	80 x 65 mm
Displacement	653 cm ³
Max. Total Output (Net)	15.0 kW @ 3600 r/min
Rated output (Net)	12.7 kW @ 3600 r/min
Maximum torque (Net)	45.6 N·m @ 2500 r/min
PTO Shaft Rotation	Counterclockwise (from PTO shaft side)
Fuel	Unleaded gasoline
Lubricant	API classification: SE or higher class SAE viscosity index: 10W-30
Oil Capacity	1.55 L (including oil filter)
Ignition System	Twin TCI
Spark Plug	NGK BPRSE
Starter	Electric starter
Governor	Centrifugal flyweight type
Air cleaner	Dual element
Carburetion system	Single barrel down draft
Lubrication System	Full filtered pressure lube
Charging Capacity	12V - 15A
Dry Weight	49.5 kg
Dimension (L x W x H)	463 x 499 x 476 mm
Approved regulation*	EPA B, CARB B, EC II, LEMAB

*Applicable in variation


PTO. Shaft variations

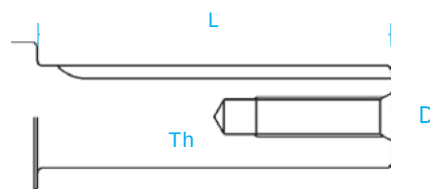







A shaft: Straight, SAE
B shaft: Straight, metric

Type	L	D	Th
A	99.3mm	28.6mm	7/16-20UNF
B	80.0mm	35.0mm	M10•1.25

PERFORMANCE CURVE

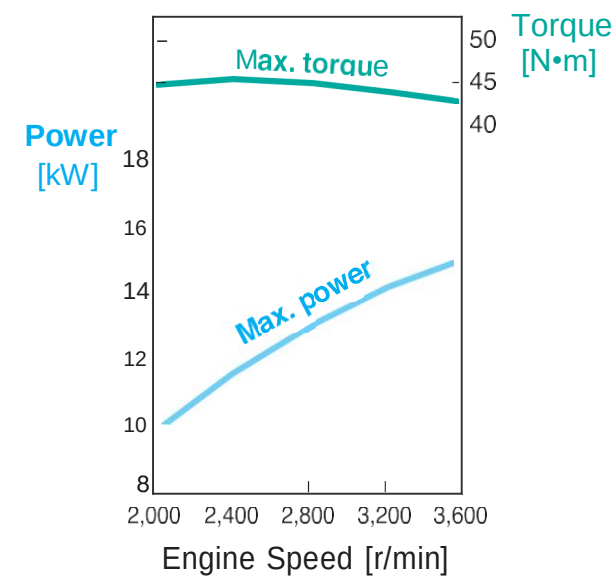


DIMENSIONS

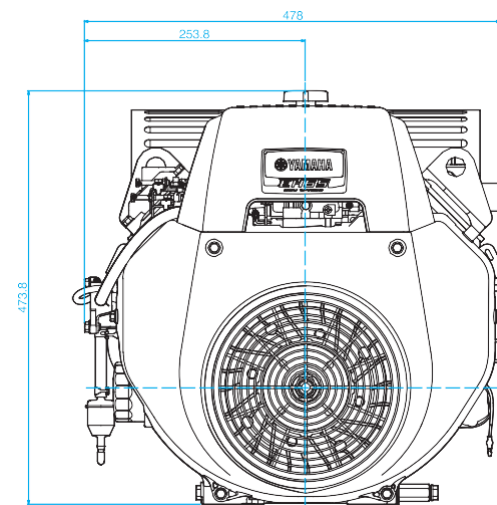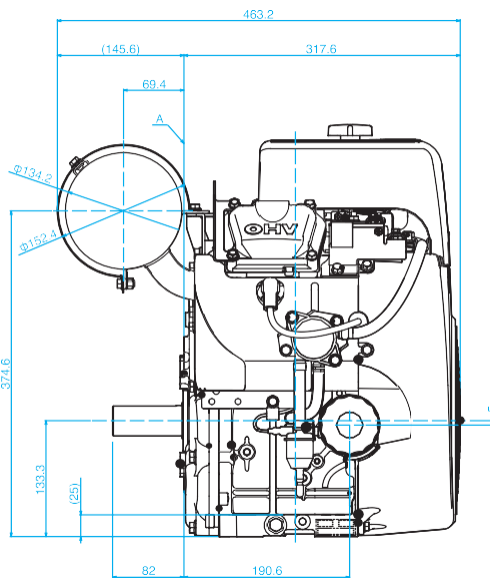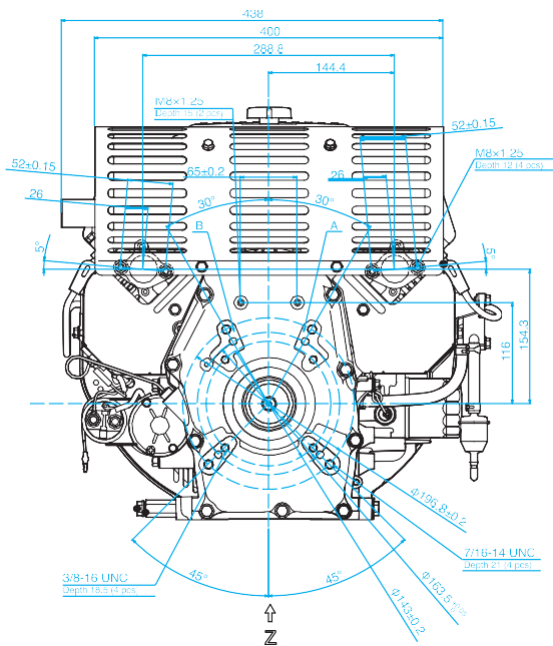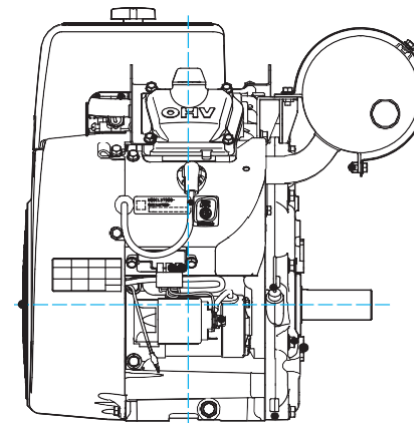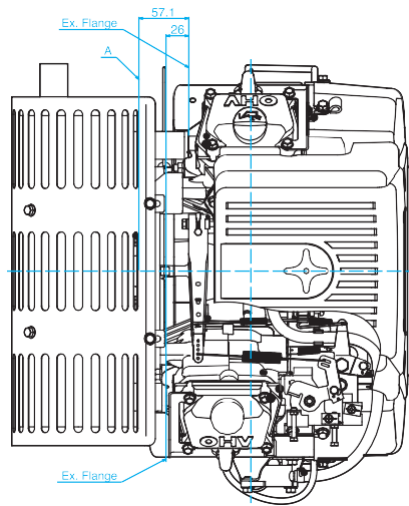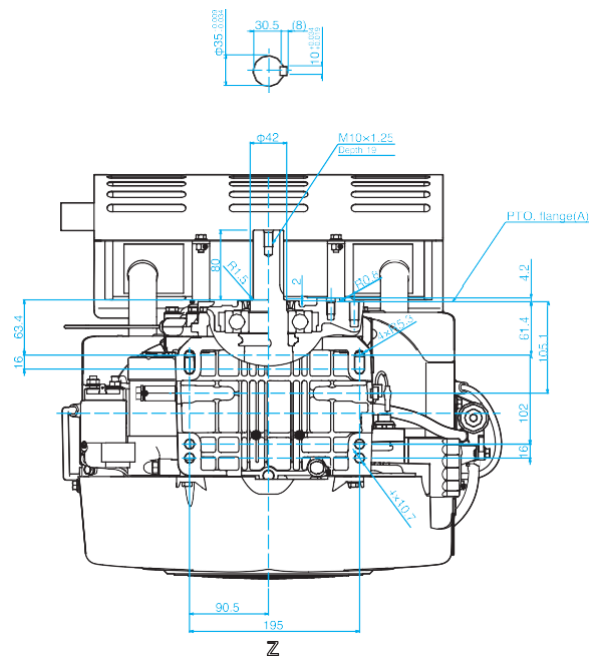

EH65 ACCESSORY

v Type 00

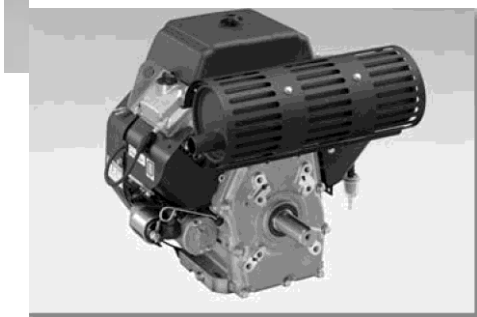


v Type 10




v Type 20



v Type 30

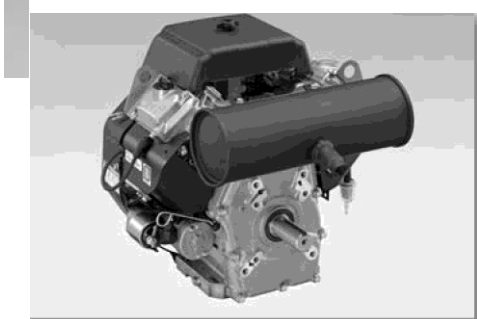

v Type 50

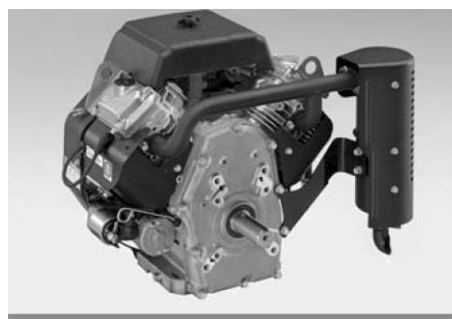

v Type 60



v Front P.T.O.



v Cluick oil drain

